

DA3200

25 MHz – 3000 MHz


The ultra wideband discone antenna



- Rugged 16 element discone.
- Ultra wideband design providing continuous coverage from 25 MHz to 3000 MHz.
- Ideal for professional, surveillance and monitoring applications.
- Designed and manufactured to exacting standards.
- Supplied with 15m of low loss 5D-2V coaxial cable.



Return loss chart

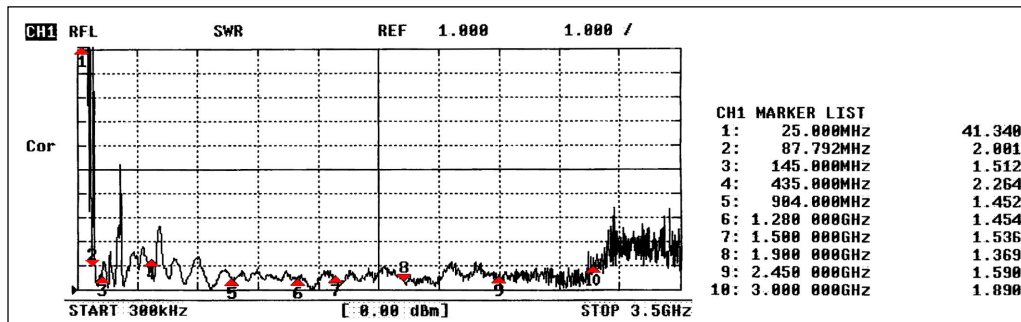


Specifications

Frequency range	25-3000MHz
Impedance	50Ω
Gain / dB	Max. 3dBi (100-3000MHz)
Connector	N socket
Weight	Approx. 1kg (cable excluded)
Rated wind velocity	50m/sec.
Dimensions	Height: 1.12m, diameter: 0.84m
Mast diameter accepted	25-50mm
Supplied accessory	Coaxial cable (5D-2V) 15m with N (antenna side) and BNC (receiver side) connectors.

- DA3200 is NOT intended for transmit purposes.
- Product design and specifications are subject to change without notice or obligation.
- ROHS compliant.

Vertical radiation pattern

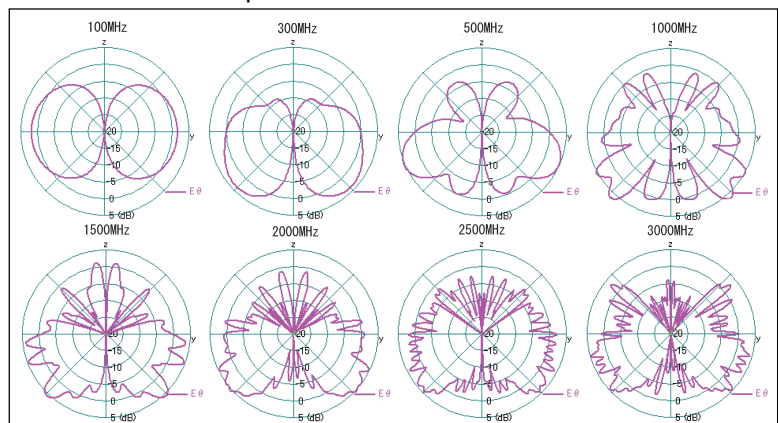

AOR, LTD.
2-6-4, Misuji, Taito-Ku, Tokyo
111-0055, Japan
www.aorja.com mail@aorja.com

AOR USA, INC.
20655 S. Western Ave. Suite 112
Torrance, CA 90501, U.S.A
Phone: 310-787-8615 Fax: 310-787-8619
www.aorusa.com info@aorusa.com

AOR UK.
Unit 9, Dimple Road Business Center, Matlock
Derbyshire DE4 3JX, U.K
Phone: 01629-581222 Fax: 01629-580070
www.aoruk.com info@aoruk.com